



## CX66XXAX

60V/150mA/2uA I<sub>Q</sub>/Fast Transient  
High PSRR Linear Voltage Regulator

### ■ Description

The CX66XXAX series is a high input voltage (60V), low quiescent current, High PSRR linear regulator (LDO) able to provide 150mA load current.

The LDO features very fast response against line voltage transient and load current transient, and ensures no overshoot voltage during the LDO start up and short circuit recovery.

The device features integrated short-circuit and thermal shutdown protection.

The device is available with fixed output voltages of 3.0V, 3.3V, 3.6V and 5.0V, and available in SOT23 and SOT89 packages.


### ■ Features

- Low Quiescent Current: 2uA
- High Input Voltage Rating: Up to 80V
- Output Current: 150mA
- High PSRR: 70dB at 1Khz
- Dropout Voltage:  
70mV@10mA  
700mV@100mA
- Fixed Output Voltages:  
3.0V, 3.3V, 3.6V and 5.0V
- High-accuracy Output Voltage: ±2%
- Good Transient Response
- Integrated Short-Circuit Protection
- Integrated Thermal Protection
- Available Packages:

### ■ Application

- Battery-powered equipment
- Smoke detector and sensor
- Micro controller Applications
- Home Appliance

### ■ Application Circuits

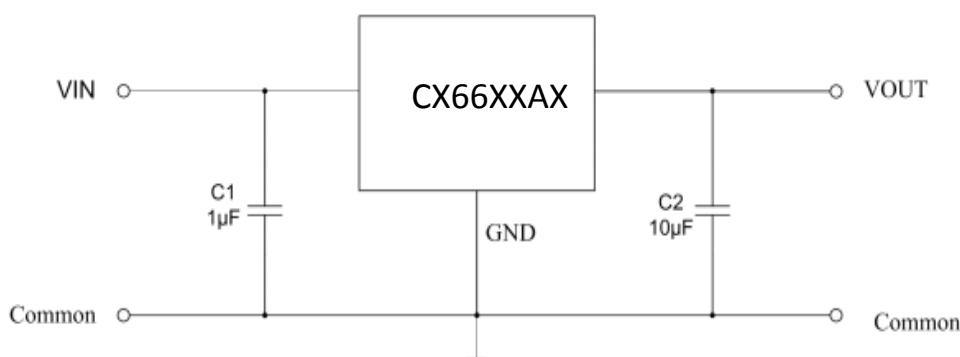




深圳市诚芯微科技股份有限公司  
SHENZHEN CHENGXINWEI TECHNOLOGY CO., LTD.

CX66XXAX

60V/150mA/2uA I<sub>Q</sub>/Fast Transient  
High PSRR Linear Voltage Regulator

## ■ Packages And Pin Assignment



CX66XXXAA




CX66XXXAB



CX66XXXAC

## ■ Ordering And Marking Information

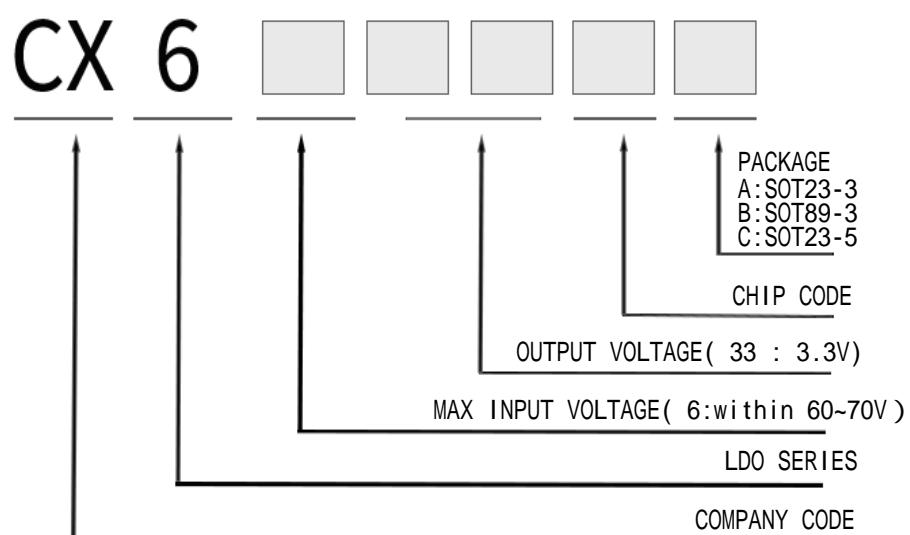




CX66XXAX

60V/150mA/2uA I<sub>Q</sub>/Fast Transient  
High PSRR Linear Voltage Regulator

## ■ Functional Block Diagram

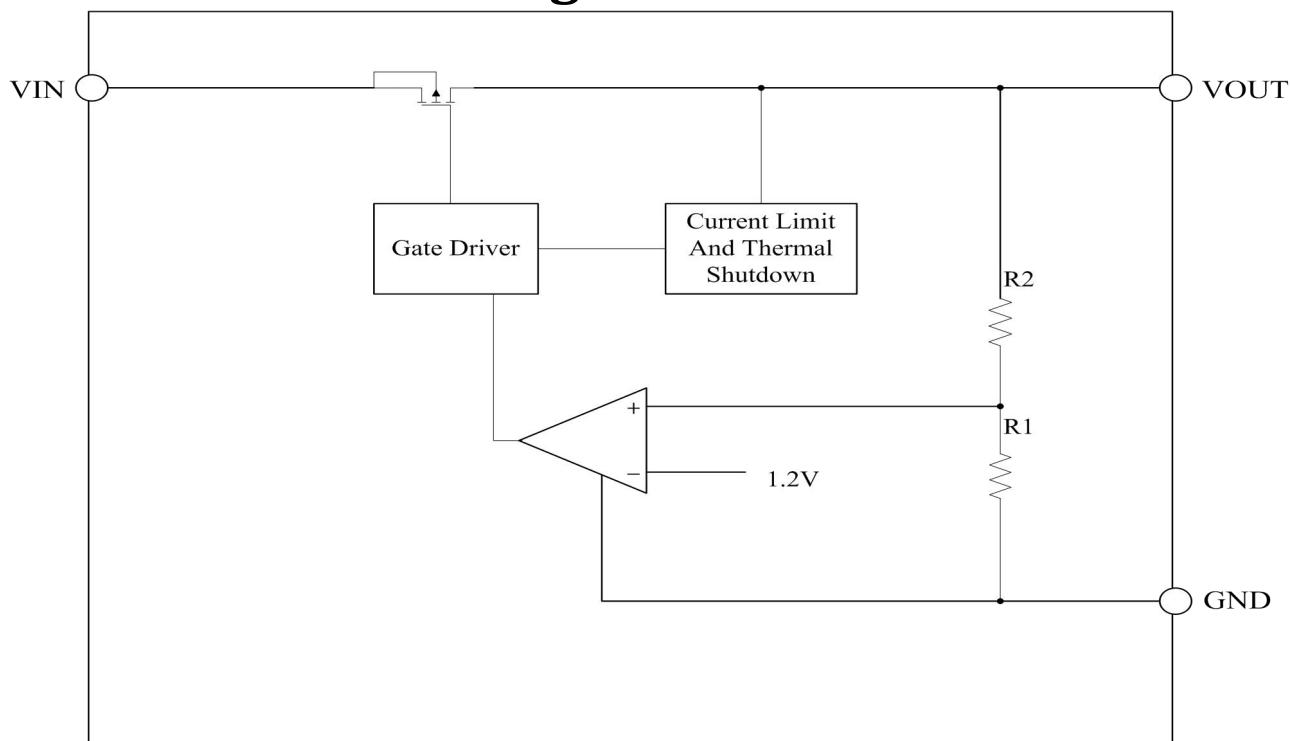

## ■ Absolute Maximum Ratings

Item	Description	Min	Max	Unit
Voltage	VIN to GND	-0.3	80	V
	VOUT to GND	-0.3	6	V
	VOUT to VIN	-35	0.3	V
Current	Peak output current	Internally limited		
Temperature	Operating Ambient Temperature	-40	85	°C
	Storage Temperature	-40	150	°C
	Operating virtual junction Temperature	-	150	°C
Thermal Resistance (Junction to Ambient)	SOT89	180		°C/W
	SOT23	380		°C/W
Power Dissipation	SOT89	600		mW
	SOT23	300		mW
Electrostatic discharge rating	Human Body Model ( HBM )	4		kV
	Charged Device Model ( MM )	100		V



## CX66XXAX

60V/150mA/2uA I<sub>Q</sub>/Fast Transient  
High PSRR Linear Voltage Regulator

### ■ Electrical Characteristics

( At T<sub>A</sub>=25°C, C<sub>IN</sub>=1uF, V<sub>IN</sub>=V<sub>OUTNOM</sub>+1.0V, C<sub>OUT</sub>=10uF, unless otherwise noted )

Symbol	Parameter	Test Conditions	MIN	TYP	MAX	UNIT
V <sub>IN</sub>	Input Voltage		5	—	60	V
I <sub>GND</sub>	Quiescent Current	V <sub>IN</sub> =12V, No load	—	2	—	uA
V <sub>OUT</sub>	Output Voltage	V <sub>IN</sub> =12V, I <sub>OUT</sub> =10mA	V <sub>OUTNOM</sub> * 0.98	V <sub>OUTNOM</sub>	V <sub>OUTNOM</sub> * 1.02	V
I <sub>OUT_MAX</sub>	Output Current		—	150	—	mA
V <sub>DROP</sub>	Dropout Voltage <sub>(1)</sub>	I <sub>OUT</sub> =10mA, V <sub>IN</sub> =V <sub>OUTNOM</sub> -0.1V	—	70	—	mV
		I <sub>OUT</sub> =100mA, V <sub>IN</sub> =V <sub>OUTNOM</sub> -0.1V	—	700	—	mV
ΔV <sub>OUT(ΔI<sub>OUT</sub>)</sub>	Load Regulation	V <sub>IN</sub> =12V, 1mA≤I <sub>OUT</sub> ≤100mA	—	0.02	—	%/mA
ΔV <sub>OUT(ΔV<sub>IN</sub>)</sub>	Line Regulation	I <sub>OUT</sub> =1mA, V <sub>OUTNOM</sub> +0.5V≤V <sub>IN</sub> ≤60V	—	0.01	—	%/V
I <sub>LIMIT</sub>	Current Limit		—	250	—	mA
T <sub>SHDN</sub>	Thermal Shutdown Temperature	Shutdown, temperature increasing	—	150	—	°C
		Reset, temperature decreasing	—	140	—	
PSRR		V <sub>in</sub> =12V, I <sub>out</sub> =10mA F=1Khz, V <sub>out</sub> =3.3V	—	70	—	dB

Note : (1) Dropout Voltage is the voltage difference between the input and the output at which the output voltage drops 2% below its nominal value.









CX66XXAX

60V/150mA/2uA  $I_Q$ /Fast Transient  
High PSRR Linear Voltage Regulator

## ■ Typical Performance Characteristics

Test Condition:  $T_A=25^\circ\text{C}$ ,  $I_{\text{OUT}}=1\text{mA}$ ,  $C_{\text{OUT}}=10\mu\text{F}$ , unless otherwise noted

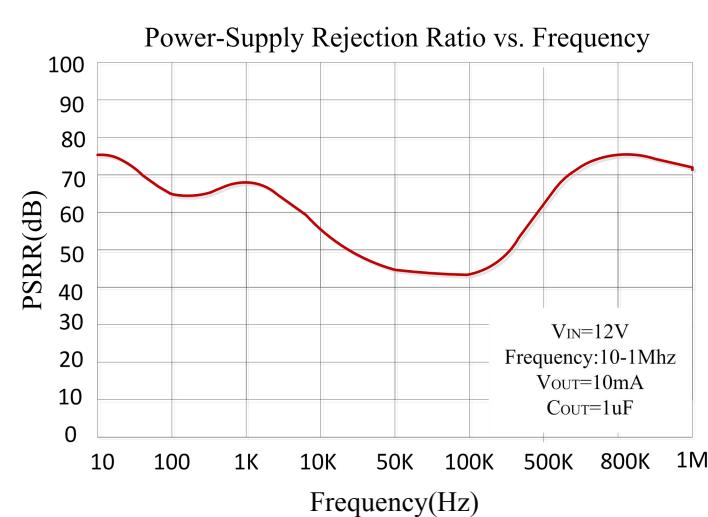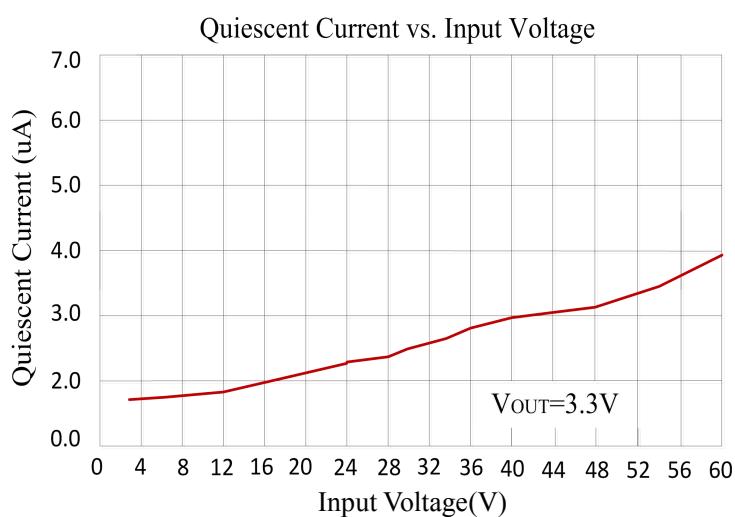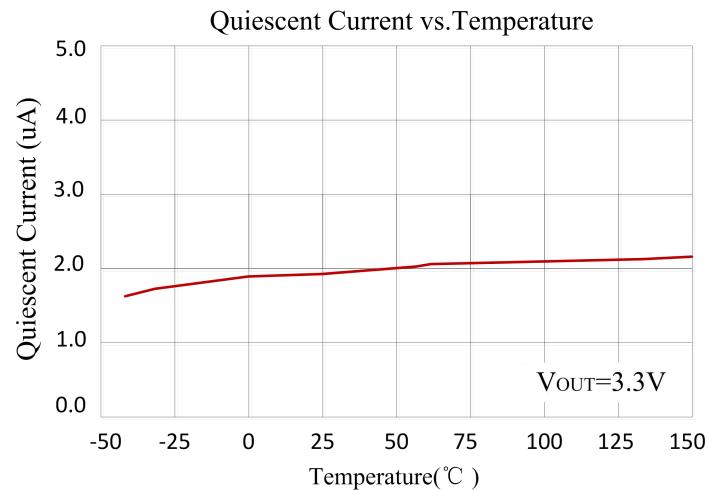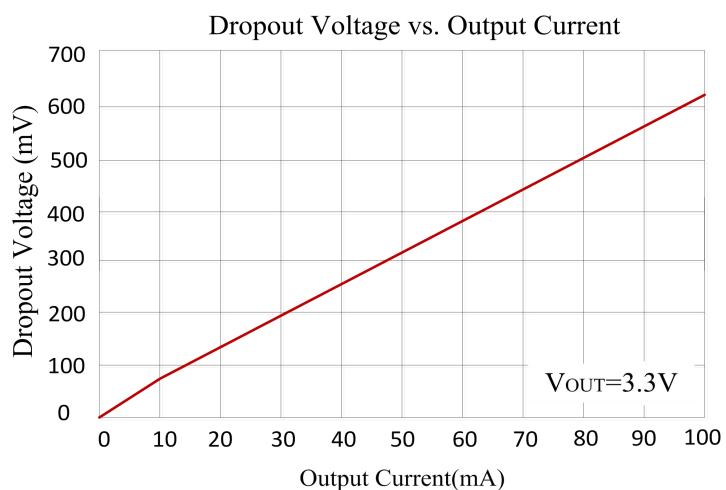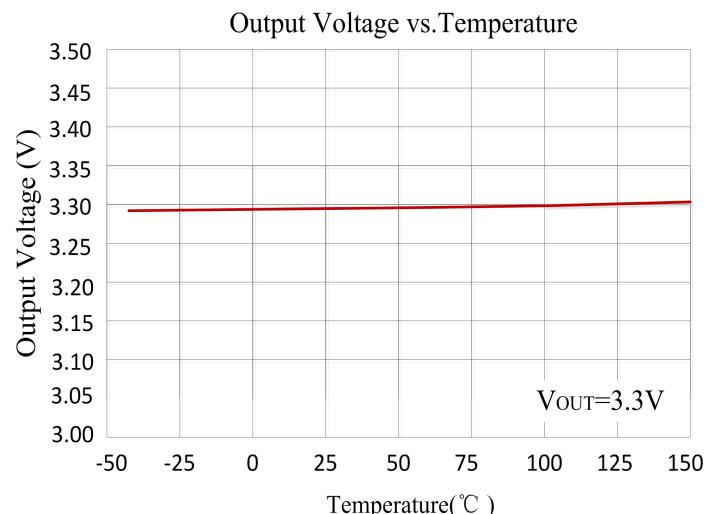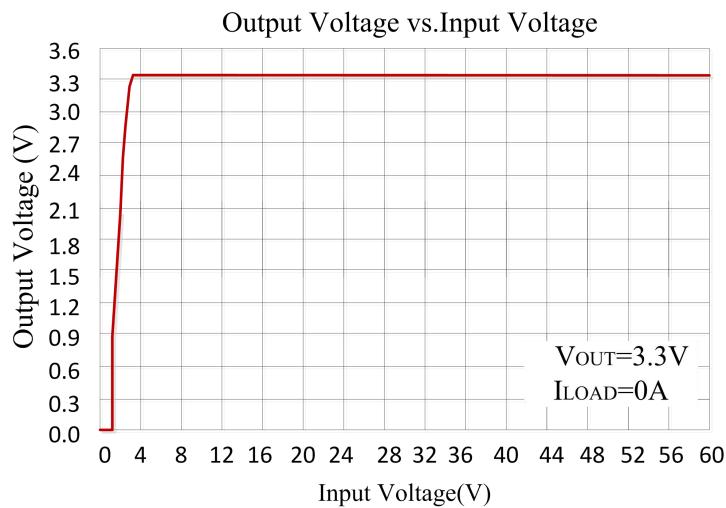





## CX66XXAX

60V/150mA/2uA  $I_Q$ /Fast Transient  
High PSRR Linear Voltage Regulator


Line Transient Response

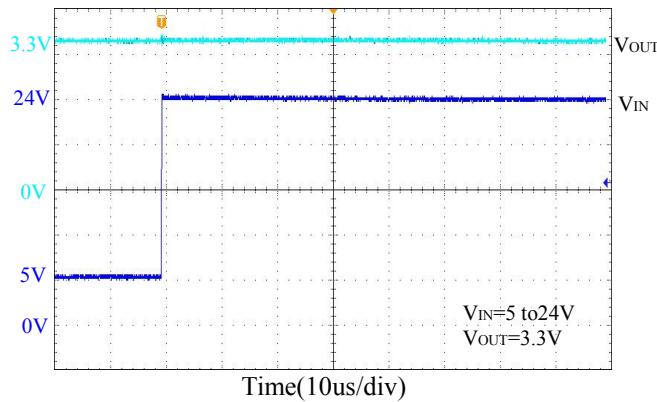


Line Transient Response

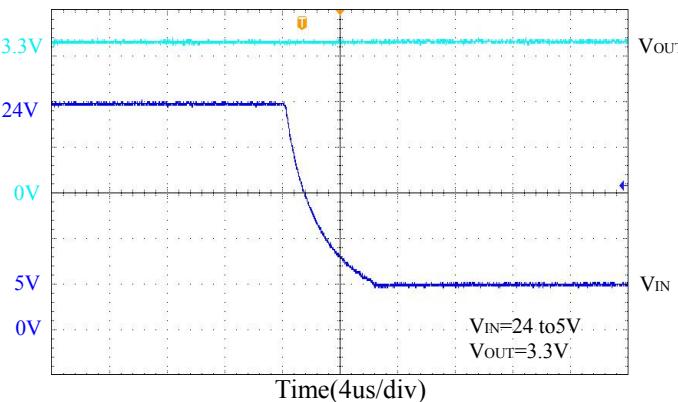


Load Transient Response

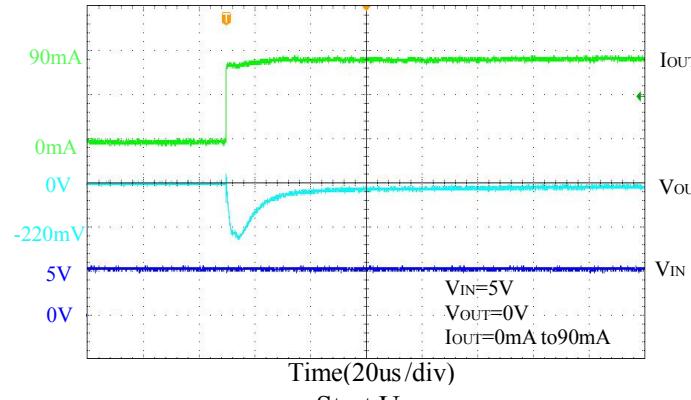


Load Transient Response

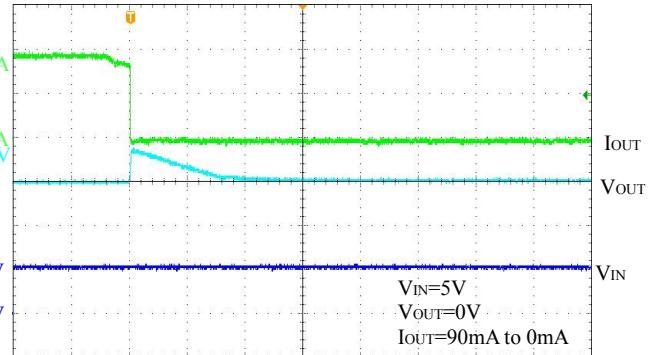


Start Up

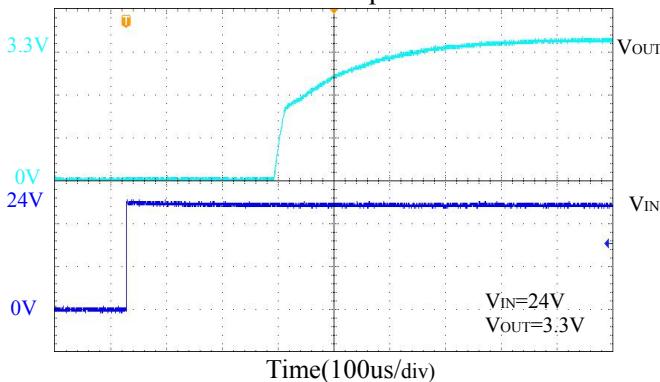


Start Up

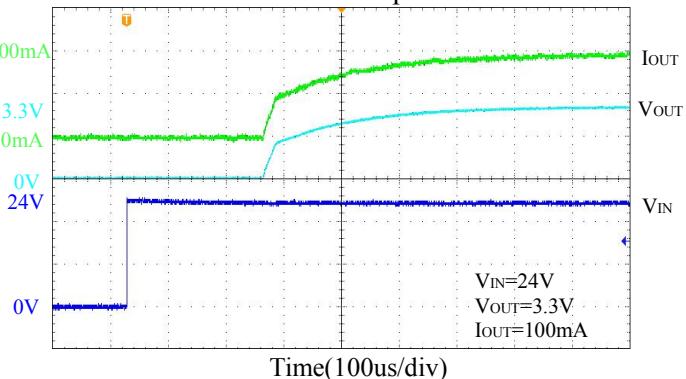

Short Circuit Protection

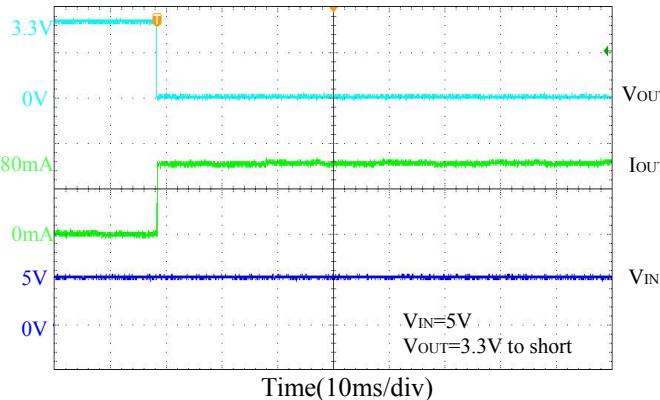

Short Circuit Protection

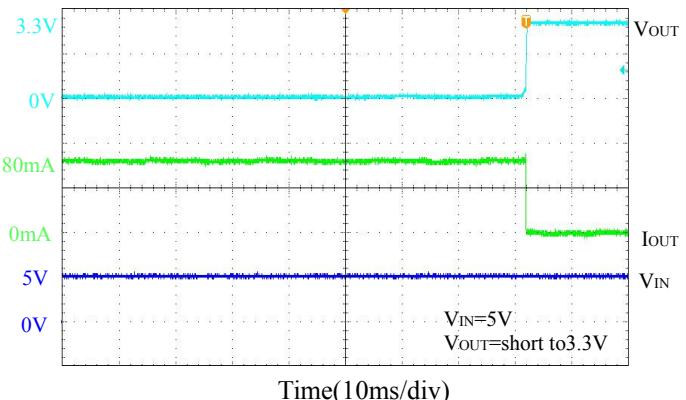



CX66XXAX

60V/150mA/2uA I<sub>Q</sub>/Fast Transient  
High PSRR Linear Voltage Regulator

## ■ Functional Description

### **Input Capacitor**

A 1μF ceramic capacitor is recommended to connect between VIN and GND pins to decouple input power supply glitch and noise. The amount of the capacitance may be increased without limit. This input capacitor must be located as close as possible to the device to assure input stability and less noise. For PCB layout, a wide copper trace is required for both VIN and GND.

### **Output Capacitor**

An output capacitor is required for the stability of the LDO. The recommended minimum output capacitance is 1μF, ceramic capacitor is recommended, and temperature characteristics are X7R or X5R. Higher capacitance values help to improve load/line transient response. The output capacitance may be increased to keep low undershoot/overshoot. Place output capacitor as close as possible to VOUT and GND pins.

### **Current Limit and Short Circuit Protection**

When output current at VOUT pin is higher than current limit threshold or the VOUT pin is direct short to GND, the current limit protection will be triggered and clamp the output current at a pre-designed level to prevent over-current and thermal damage.

### **Thermal Protection**

The CX66XXAX has internal thermal sense and protection circuits. When excessive power dissipation happens on the device, such as short circuit at the output pin or very heavy load current with a large voltage drop across the device, the internal thermal protection circuit will be triggered, and it will shut down the power MOSFET to prevent the LDO from damage. As soon as excessive thermal condition is removed and the temperature of the device drops down, the thermal protection circuit will lease the control of the power MOSFET, and the LDO device goes to normal operation.




CX66XXAX


60V/150mA/2uA I<sub>Q</sub>/Fast Transient  
High PSRR Linear Voltage Regulator

## ■ Package Outline Dimensions

### SOT23-3

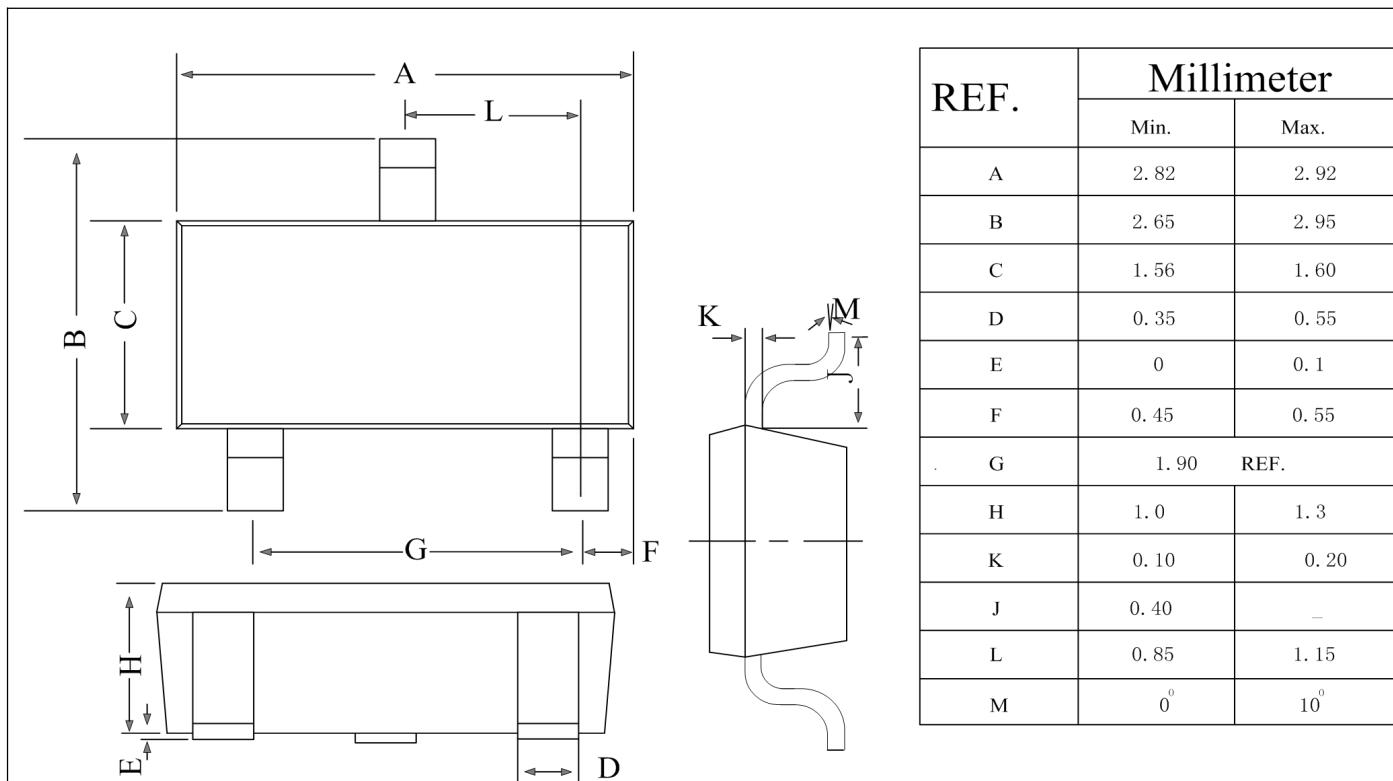

SOT89-3

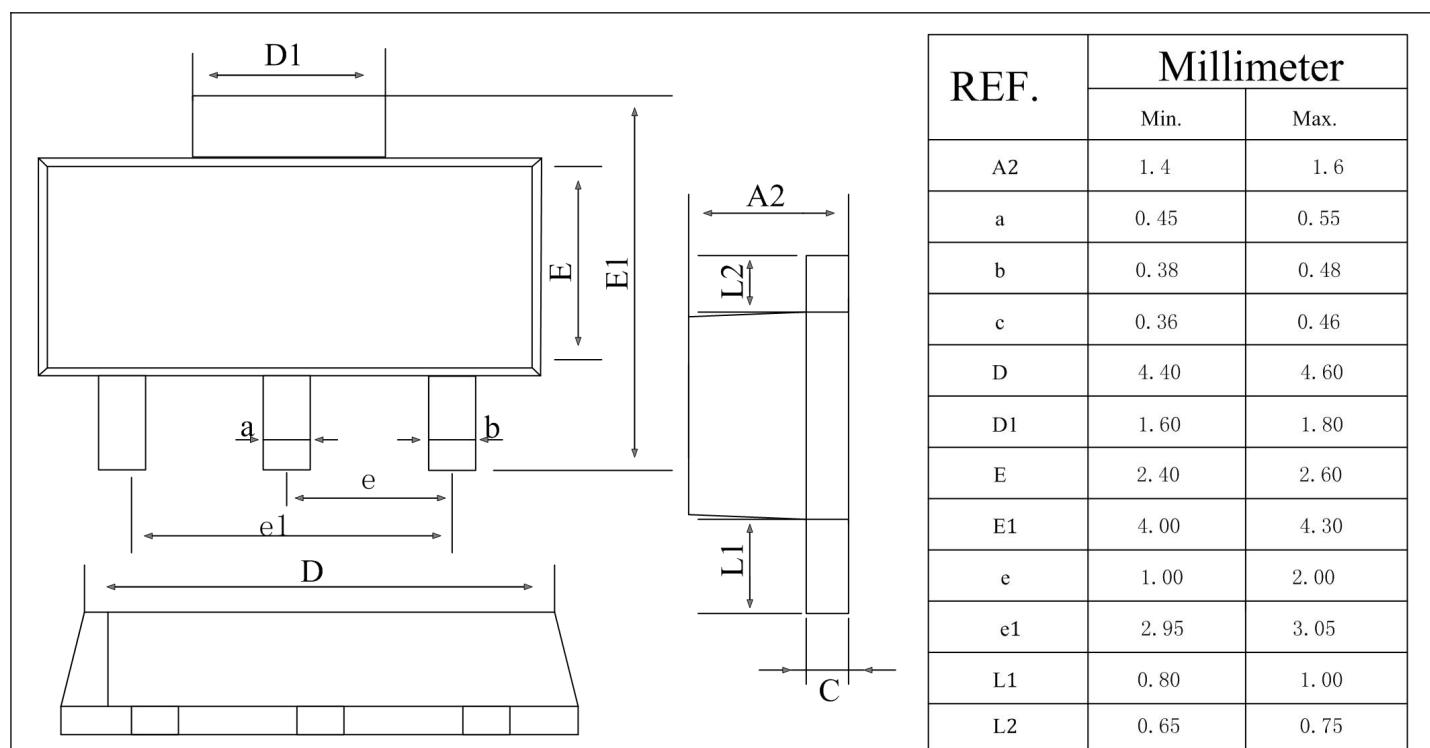




深圳市诚芯微科技股份有限公司  
SHENZHEN CHENGXINWEI TECHNOLOGY CO., LTD.

CX66XXAX

60V/150mA/2uA I<sub>Q</sub>/Fast Transient  
High PSRR Linear Voltage Regulator

SOT23-5

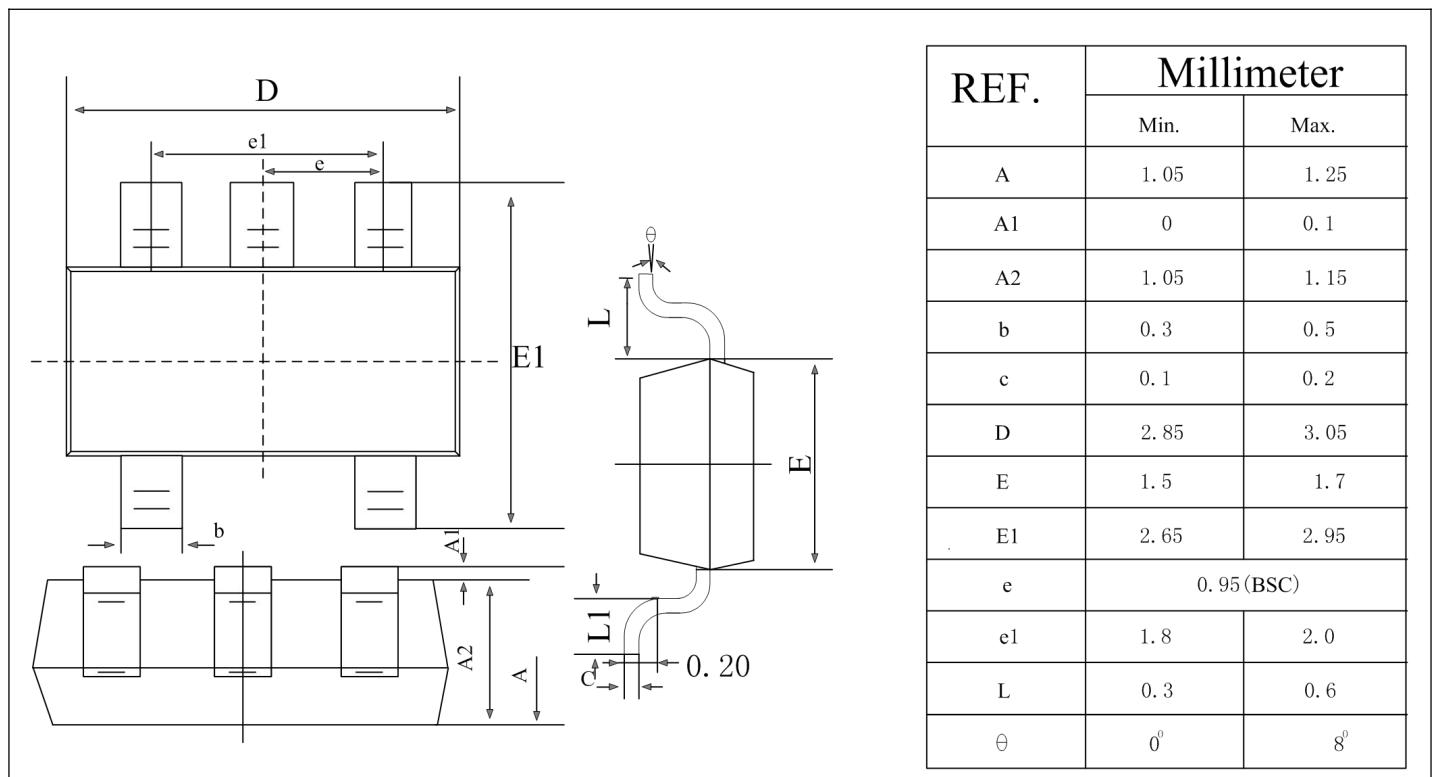





深圳市诚芯微科技股份有限公司  
SHENZHEN CHENGXINWEI TECHNOLOGY CO., LTD.

CX66XXAX

60V/150mA/2uA I<sub>Q</sub>/Fast Transient  
High PSRR Linear Voltage Regulator

## ■ Packing Information

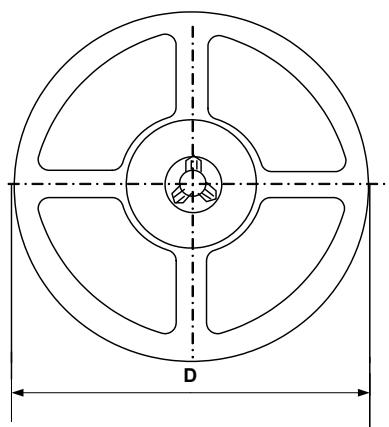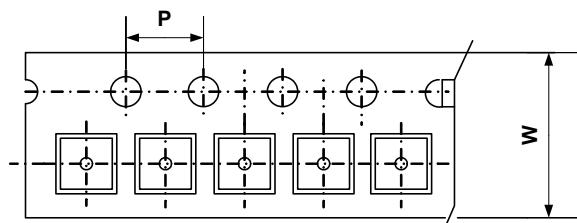

Type	W(mm)	P(mm)	D(mm)	Qty (pcs)
SOT23-3	8.0±0.1 mm	4.0±0.1 mm	180±1 mm	3000pcs
SOT23-5	8.0±0.1 mm	4.0±0.1 mm	180±1 mm	3000pcs
SOT89-3	12.0±0.1 mm	4.0±0.1 mm	180±1 mm	1000pcs