




◆ Features

- 1、Magnetic-resin shielded construction reduces buzz noise to ultra-low levels;
- 2、Metallization on ferrite core results in excellent shock resistance and damage-free durability;
- 3、Closed magnetic circuit design reduces leakage
- 4、Small and low profile inductor;
- 5、Take up less PCB real estate and save more power。

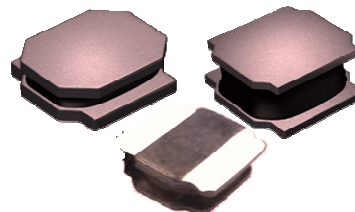

◆ Applications


- 1、Smart phone;
- 2、Mobile devices with multifunction such as adding color TV and camera;
- 3、Flat-screen TVs, blue-ray disc recorders, set top boxes;
- 4、Notebooks, desktop computers, servers, graphic cards;
- 5、Portable gaming devices, personal navigation systems, personal multimedia devices;
- 6、Automotive systems;
- 7、Telecomm base stations。

◆ Lead Free Part Numbering


CMLW 252010 P 2R2 M S T
(1) (2) (3) (4) (5) (6) (7)

- (1) Series Type
- (2) Dimension : L×W×H(2.5×2.0×1.0mm)
- (3) Material Code
- (4) Inductance: 2R2=2.2μH ;
100=10μH; 101=100μH
- (5) Inductance Tolerance: M=±20%, N=±30%
- (6) Company Code
- (7) Packaging : Tape Carrier Package

◆ Dimensions

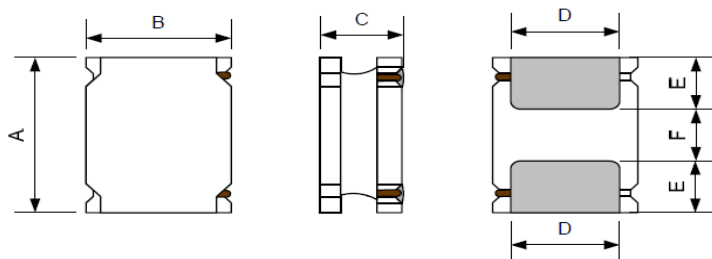

Recommended Land Pattern




Unit:mm

Series	A	B	C	D	E	F	a Typ.	b Typ.	c Typ.
CMLW252010P	2.5±0.2	2.0±0.2	1.0Max.	1.5±0.2	0.80±0.2	0.80±0.2	0.80	0.85	2.0

◆ Electrical Characteristics

- 1) Operating temperature range (Including self-heating): $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- 2) Storage temperature range (packaging conditions): $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$ and RH 70% (Max.)


◆ Construction and material




No.	Components	Material
①	Core	Soft magnetic Metal
②	Wire	Polyurethane system enameled copper wire
③	Magnetic Glue	Epoxy resin and magnetic powder
④	substrate	FeNiCu/Ag or Ag/Ni/Sn
⑤	Top Electrodes	Sn alloy
⑥	Marking	Nitrocellulose

◆ REFLOW-PROFILE

Limit Profile

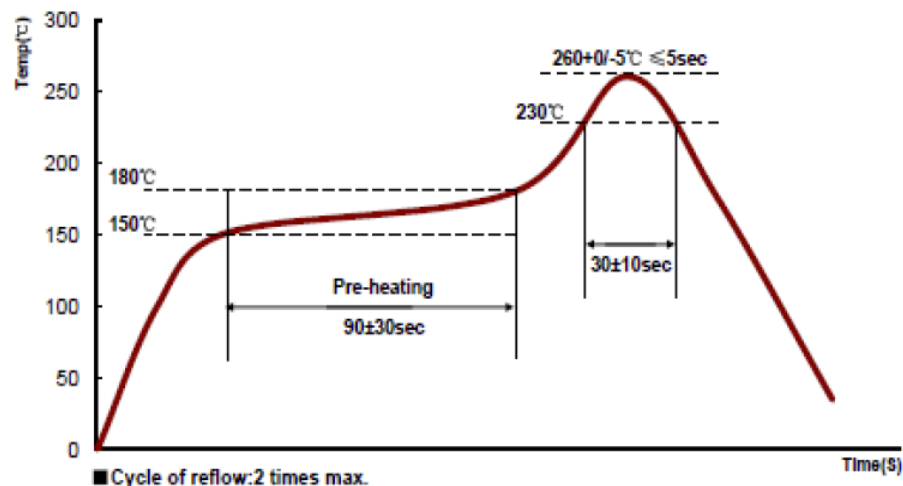

Standard Profile (for EOC Solder paste S70G-HF)

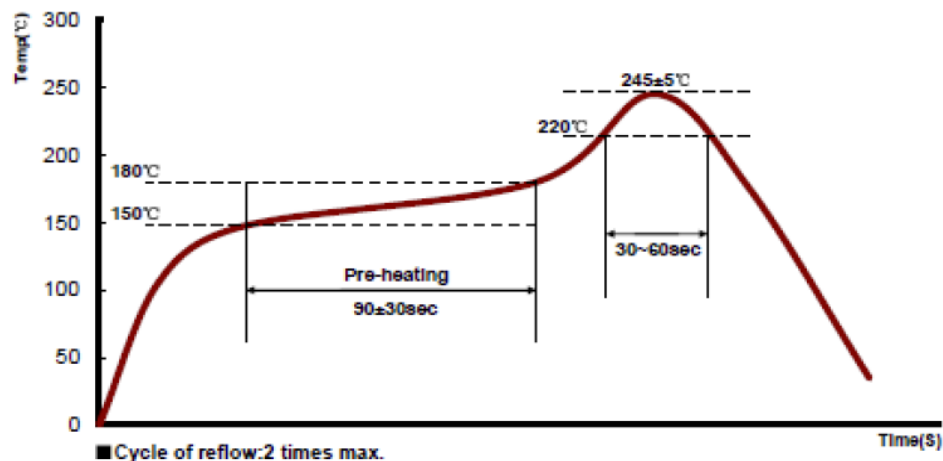

◆ **Specification**

Part Number	Inductance @1MHz,0.1V (μH)	DC Resistance(m Ω)		Saturation Current Isat		Heat Rating Current Irms	
		DCR		Min. (A)	Typ. (A)	Min. (A)	Typ. (A)
		Typ.	Max.				
CMLW252010P Series							
CMLW252010PR24MST	0.24±20%	24	32	6.7	7.2	4.00	4.70
CMLW252010PR33MST	0.33±20%	25	33	5.3	5.6	3.85	4.50
CMLW252010PR47MST	0.47±20%	38	45	4.9	5.5	3.20	3.80
CMLW252010PR68MST	0.68±20%	43	59	3.6	4.2	2.80	3.30
CMLW252010P1R0MST	1.0±20%	59	76	3.2	3.5	2.50	3.00
CMLW252010P1R5MST	1.5±20%	84	101	2.7	3.2	2.10	2.40
CMLW252010P2R2MST	2.2±20%	129	155	2.0	2.3	1.60	1.90
CMLW252010P3R3MST	3.3±20%	196	235	1.6	1.8	1.20	1.40
CMLW252010P4R7MST	4.7±20%	230	276	1.3	1.5	1.10	1.30
CMLW252010P6R8MST	6.8±20%	340	420	1.0	1.1	0.90	1.00
CMLW252010P100MST	10±20%	435	600	0.9	1.0	0.80	0.90


◆ **Note**

- 1: All test data is referenced to 20°C ambient;
- 2: Rated current: Isat or Irms, whichever is smaller;
- 3: Isat: DC current at which the inductance drops approximate 30% from its value without current;
- 4: Irms: DC current that causes the temperature rise ($\Delta T = 40^\circ\text{C}$) from 20°C ambient.


◆ **TYPICAL ELECTRICAL CHARACTERISTICS**

CMLW252010P Series


Temperature vs.DC Current Characteristics

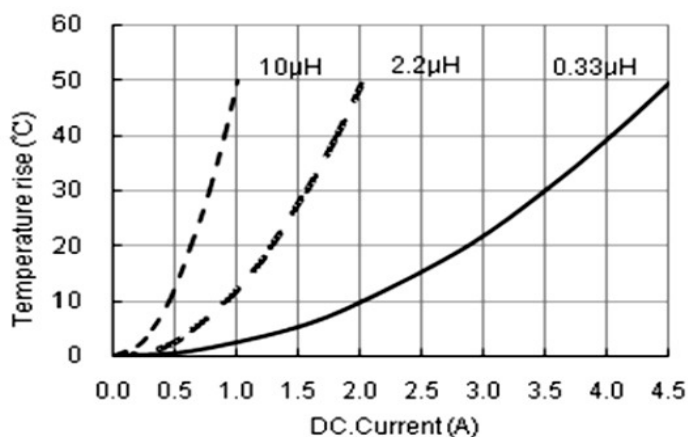

Inductance vs.DC Current Characteristics

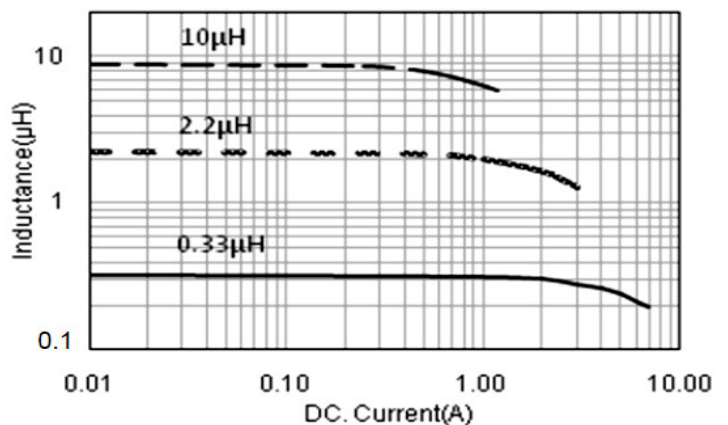

◆ Reliability Test

Items	Requirements	Test Methods and Remarks
A. Terminal Strength	No removal or split of the termination or other defects shall occur.  Fig.7.1-1	1) Solder the inductor to the testing jig (glass epoxy board shown in Fig.7.1-1) using eutectic solder. Then apply a force in the direction of the arrow. 2) 10N force. 3) Keep time: 5±2s
B. High Temperature	1. No visible mechanical damage. 2. Inductance change: Within ±10%	1) Storage Temperature :125+/-5℃ 2) Duration : 96 ±4 Hours 3) Recovery : then measured at room ambient temperature after placing 24 hours.
C. Low Temperature	1. No visible mechanical damage 2. Inductance change: Within ±10%	1) Temperature and time: -40±5℃ 2) Duration: 96±4 hours 3) TRecovery : then measured at room ambient temperature after placing 24 hours.
D. Vibration test	1. No visible mechanical damage. 2. Inductance change: Within ±10%	1) Frequency range:10HZ~55HZ~10HZ 2) Amplitude:1.5mm p-p 3) Direction:X,Y,Z 4) Time:1 minute/cycle,2hours per axis
E. High Temperature Storage Tested	1. No visible mechanical damage. 2. Inductance change: Within ±10%	1) Storage Temperature :60+/-2℃ 2) Relative Humidity :90-95% RH 3) Duration : 96 ±4 Hours 4) Recovery : then measured at room ambient temperature after placing 24 hours.
F. Resistance to Soldering Heat	1. No visible mechanical damage. 2. Inductance change: Within ±10%	1) Re-flowing Profile: Please refer to Fig. 1 2) Test board thickness: 1.0mm 3) Test board material: glass epoxy resin 4) The chip shall be stabilized at normal condition for 1~2 hours before measuring
G. Thermal Shock	1. No visible mechanical damage. 2. Inductance change: Within ±10%	1) Temperature and time: -40±3℃ for 30±3 min→105℃ for 30±3min, please refer to Fig. 2. 2) Transforming interval: Max, 3 minute 3) Tested cycle: 100 cycles 4) The chip shall be stabilized at normal condition for 1~2 hours before measuring

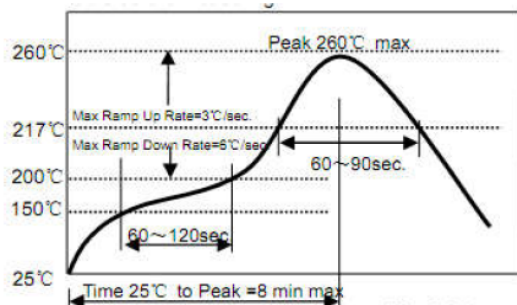


Fig. 1


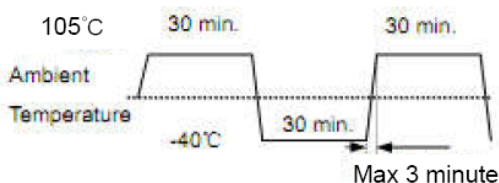


Fig. 2


◆Packaging and Marking:

1.Carrier Tape Dimensions:

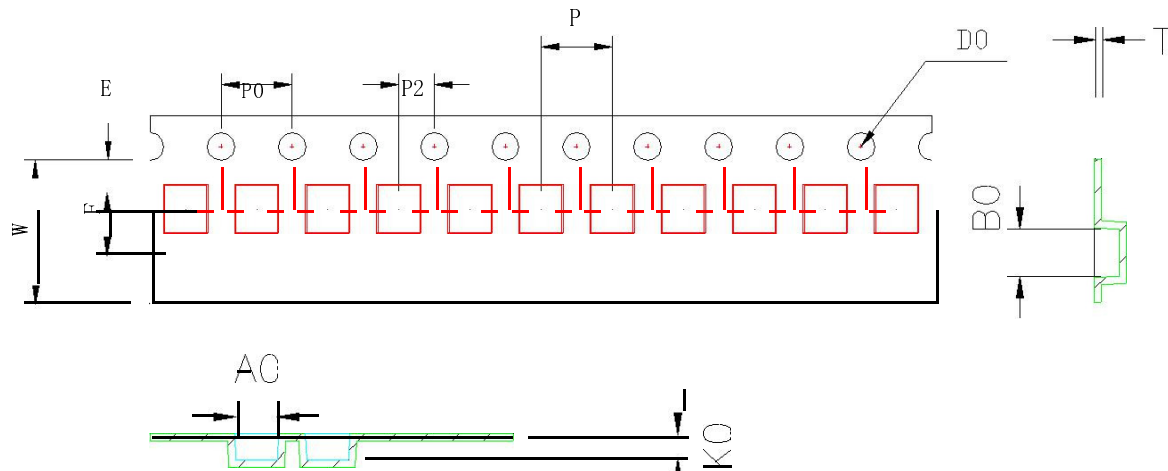


ITEM	W	A0	B0	K0	P	F	E	D0	P0	P2	T
DIM	8.00	2.00	2.40	1.20	4.00	3.5	1.75	1.50	4.00	2.00	0.25
TOLE	±0.3	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	+0.1	±0.1	±0.1	±0.05

2.Taping Dimensions:



3.Reel Dimensions:

Carrier Tape Reel

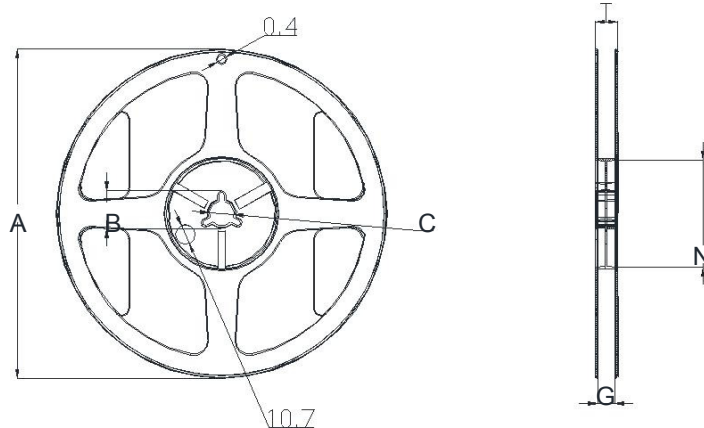

Type	A	B	C	G	N	T
8mm	178	20.7±0.8	13±0.4	9	60	10.8

4. Packaging Quantity:

Standard Packing Quantity: 2000 pcs/reel