

Version: 1.0

SPECIFICATION FOR APPROVAL

RoHS
COMPLIANT

ITEM P/N	CMW5045A-102	TEST INSTRUMENT	4291B - 4339B
PRODUCT	Common Choke Coil For Power Lines	TEST FREQUENCY	100 MHz / 0.5V

CUSTOMER :

CUSTOMER P/N :

DESCRIPTION : Common Choke Coil For Power Lines

Cybermax P/N : CMW5045A-102

REVISION NO. : V1.0

DATE : 2015/12/16

HT DOCUMENTED	
APPROVED	JACK
CHECKED	BRUCE
PREPARED	CARRIE

CUSTOMER APPROVAL

company seals


Version: 1.0

SPECIFICATION


RoHS
COMPLIANT

ITEM P/N	CMW5045A-102	TEST INSTRUMENT	4291B 、 4339B
PRODUCT	Common Choke Coil For Power Lines	TEST FREQUENCY	100 MHz / 0.5V

PACKING DIMENSIONS (mm)

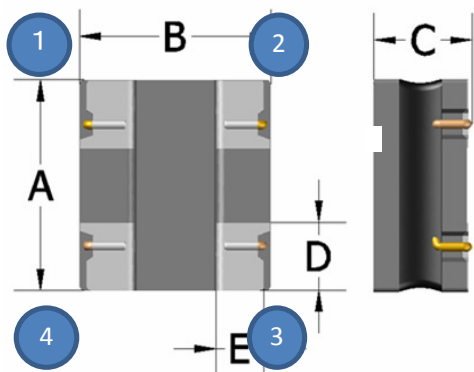

Marking




5045	Dimensions
A	5.0 ± 0.3
B	4.5 ± 0.3
C	2.5 Max.
D	1.6 ± 0.3
E	1.4 ± 0.3

EXPLANATION OF PART NUMBERS

1	2	3	4	5	6	7	8	9	10	11	
C	M	W	5	0	4	5A	-	1	0	2	N
(1)			(2)			(3)					

- (1) Product name
(2) Shapes and dimensions
(3) Impedance 【 at 100MHz 】
101:100Ω

Equivalent Circuits



No polarity

ELECTRICAL CHARACTERISTICS

P/N	Z(Ω)	Rated current Idc(A) [Max]	DCR (Ω)	Rated Voltage Vdc	Withstand Voltage Vdc	Insulation Resistance IR
	Point1-Point2 point3-point4					
	Impedance at 100MHz					
CMW5045A-102	1000 Typ.	3	±40% 0.024	(V)Typical 50	(V)Typical 125	(MΩ)Min. 10

Operating temperature : -40 to +85°C

Storage temp. and humidity : -40 to +85°C ,70%RH max

Typical Heat Rating DC Current would cause an approximately ΔT of 40°C

If Use Wave soldering is there will be some risk. Re-flow soldering temperatures below 240 degrees, there will be unwitting risk

Solder standard according to IPC-A-610D 8.2.1 Chip Components - Bottom Only Terminations


Version: 1.0

CHARACTERISTICS

**RoHS
COMPLIANT**


ITEM P/N	CMW5045A-102	TEST INSTRUMENT	4291B - 4339B
PRODUCT	Common Choke Coil For Power Lines	TEST FREQUENCY	100 MHz / 0.5V

PERFORMANCE CURVES

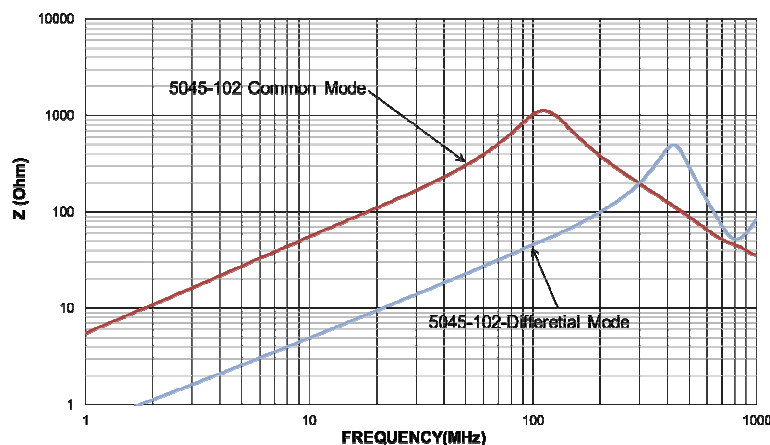

Recommended Footprint(mm)

5045	Dimensions
L	5.5 ref.
H	4.6 ref.
G1	2.35 ref.
G2	1.85 ref.



Electrical Performance

No.	Item	Specifications	Test Method
1	Impedance ($ Z $) (at 10MHz)	Meet item 3.	Measuring Equipment : 4291B or the equivalents. Measuring Frequency : 10MHz
2	Insulation Resistance (I.R.)		Measuring Equipment : 4339B or the equivalents. Test Voltage : 2times for Rated Voltage Time : within 60 s
3	DC Resistance (Rdc)		Measuring Current : 100 mA max. (In case of doubt in the above mentioned standard condition,measure by 4 terminal method.)
4	Withstanding Voltage	Products shall not be damaged.	Voltage : 125 V(DC) Time : 60 s Charge Current : 1 mA max.





Version: 1.0

RELIABILITY

**RoHS
COMPLIANT**

ITEM P/N	CMW5045A-102	TEST INSTRUMENT	4291B、4339B
PRODUCT	Common Choke Coil For Power Lines	TEST FREQUENCY	100 MHz / 0.5V

Mechanical Performance

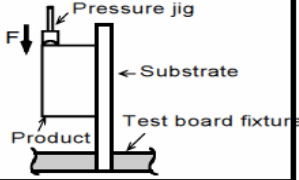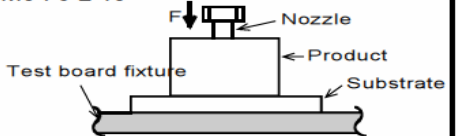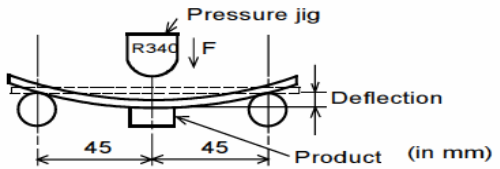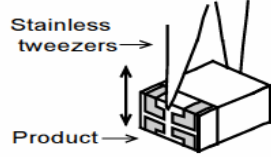No.	Item	Specifications	Test Method								
1	Appearance and Dimensions		Visual Inspection and measured with Slide Calipers.								
2	Bonding Strength and Core Strength	No evidence of chipping,breakage. No evidence of coming off glass-epoxy substrate.	Applying Force (F) : 10N Applying Time : 5 ± 1s 								
3	Body strength	No evidence of chipping,breakage.	Applying Force (F) : 10N Applying Time : 5 ± 1s 								
4	Bending Strength	Meet Table 1. <table border="1"><tr><td>Appearance</td><td>No damaged.</td></tr><tr><td>Impedance change (at 10MHz)</td><td>within ± 20%</td></tr><tr><td>I.R.</td><td>10MΩ min.</td></tr><tr><td>Withstanding Voltage</td><td>No damaged.</td></tr></table>	Appearance	No damaged.	Impedance change (at 10MHz)	within ± 20%	I.R.	10MΩ min.	Withstanding Voltage	No damaged.	Substrate : Glass-epoxy (t=1.6mm) Deflection : 2.0mm Keeping Time : 30 s Speed of Applying Force : 0.5 mm/s 
Appearance	No damaged.										
Impedance change (at 10MHz)	within ± 20%										
I.R.	10MΩ min.										
Withstanding Voltage	No damaged.										
5	Vibration		Products shall be soldered on the substrate. Oscillation Frequency : 10 to 55 to 10Hz for 1 min. Total Amplitude : 1.5mm Testing Time : A period of 2 hours in each of 3 mutually perpendicular directions (Total 6 hours).								
6	Drop		Products shall be dropped concrete or steel board. Method : free fall Height : 1m The Number of Times : 10 Times								
7	Solderability	The electrodes shall be at least 90% covered with new solder coating.	Flux : Ethanol solution of rosin,25(wt)% Pre heating : 150 ± 10°C, 1 minute. Solder : (1) Sn/Pb = 60/40 (2) Sn-3.0Ag-0.5Cu Solder Temperature : (1)230±5°C (2)245±5°C Immersion Time : 4 ± 1s Immersion and Immersion rates : 25mm/s 								
8	Resistance to Soldering heat	Meet Table 1.	Flux : Ethanol solution of rosin,25(wt)% Pre heating : 150 ± 10°C, 1 minute. Solder : Sn/Pb = 60/40 or Sn-3.0Ag-0.5Cu Solder Temperature : 270 ± 5°C Immersion Time : 5 ± 1s Immersion and Immersion rates : 25mm/s Then measured after exposure in the room condition for 4 to 48 hours.								

Version: 1.0

RELIABILITY

**RoHS
COMPLIANT**

ITEM P/N	CMW5045A-102	TEST INSTRUMENT	4291B - 4339B
PRODUCT	Common Choke Coil For Power Lines	TEST FREQUENCY	100 MHz / 0.5V



Enviromental Performance

(Product shall be solderd on the glass-epoxy substrate (t=1.6mm))

No.	Item	Specifications	Test Method
1	Temperature Cycle	Meet Table 1.	1 cycle 1 step : -25 °C (+0, -3)°C / 30min (+ 3,- 0) min 2 step : Ordinary temp. / 3 min max. 3 step : +85 °C (+3, -0)°C / 30min (+ 3,- 0) min 4 step : Ordinary temp. / 3 min max. Total of 10 cycles Then measured after exposure in the room condition for 4 to 48 hours.
2	Humidity		Temperature : 40 ± 2 °C Humidity : 90 to 95 %(RH) Time : 1000 h (+48 h , -0 h) Then measured after exposure in the room condition for 4 to 48 hours.
3	Humidity Load		Temperature : 40 ± 2 °C Humidity : 90 to 95 %(RH) Test Voltage : Rated Voltage Time : 1000 h (+48 h , -0 h) Then measured after exposure in the room condition for 4 to 48 hours. (ref. Item)
4	Heat life		Temperature : 85 ± 2 °C Test Voltage : 2times for Rated Voltage Time : 1000 h (+48 h , -0 h) Then measured after exposure in the room condition for 4 to 48 hours. (ref. Item)
5	Cold Resistance		Temperature : - 40 ± 2 °C Time : 1000 h (+48 h , -0 h) Then measured after exposure in the room condition for 4 to 48 hours. (ref. Item)

Terminal to be Tested

When measuring and suppling the voltage, the following terminal is applied.

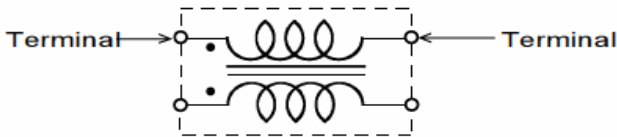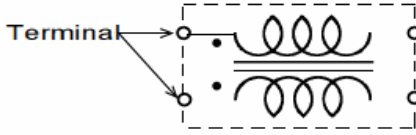No.	Item	Terminal to be Tested
1	Impedance (Z) (Measurement Terminal)	
2	DC Resistance (Rdc) (Measurement Terminal)	
3	Insulation Resistance (I.R.) (Measurement Terminal)	
4	Withstanding Voltage (Measurement Terminal)	
5	Humidity Load (Supply Terminal)	
6	Heat Life (Supply Terminal)	

Version: 1.0

PACKING FOR SMD

**RoHS
COMPLIANT**

ITEM P/N	CMW5045A-102	TEST INSTRUMENT	4291B - 4339B
PRODUCT	Common Choke Coil For Power Lines	TEST FREQUENCY	100 MHz / 0.5V

Soldering and Mounting

1. Soldering

Mildly activated rosin fluxes are preferred. terminations are suitable for all wave and re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

1.1 Solder re-flow:

Recommended temperature profiles for re-flow soldering in Figure 1.

1.2 Soldering Iron(Figure 2):

Products attachment with a soldering iron is discouraged due to the inherent process control limitations. In the case that a soldering iron must be employed, the following precautions are recommended.

- Preheat circuit and products to 150°C
- Never contact the ceramic with the iron tip
- Use a 20 watt soldering iron with tip diameter of 1.0mm
- 355°C tip temperature (max)
- 1.0mm tip diameter (max)
- Limit soldering time to 4~5 sec.

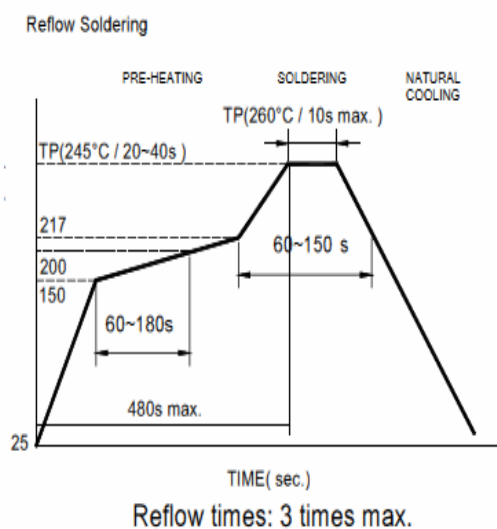


Fig.1

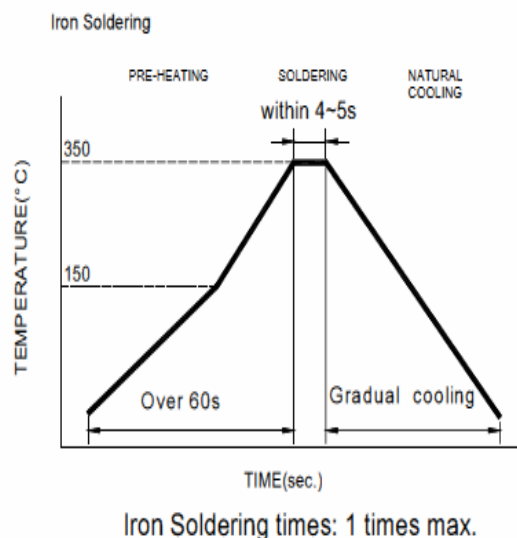


Fig.2


Version: 1.0

PACKING FOR SMD


**RoHS
COMPLIANT**

ITEM P/N	CMW5045A-102	TEST INSTRUMENT	4291B - 4339B
PRODUCT	Common Choke Coil For Power Lines	TEST FREQUENCY	100 MHz / 0.5V

Reel Dimension & Tape Dimension

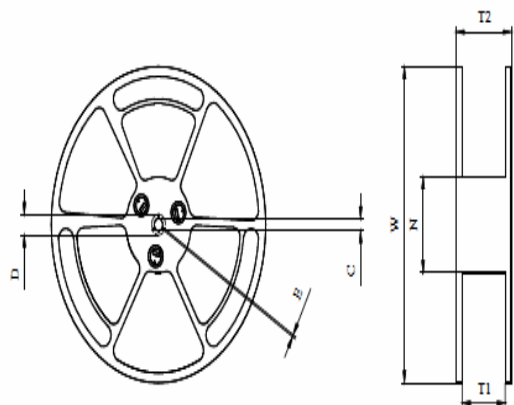

Type	W(mm)	D(mm)	C(mm)	T1(mm)	N(mm)	T2(mm)	E(mm)
φ 330	330±1.5	21.5+0.5/-0	13+0.5-0.2	2.5+0.5/-0	100±1.5	16.9±0.4	2.00±0.5

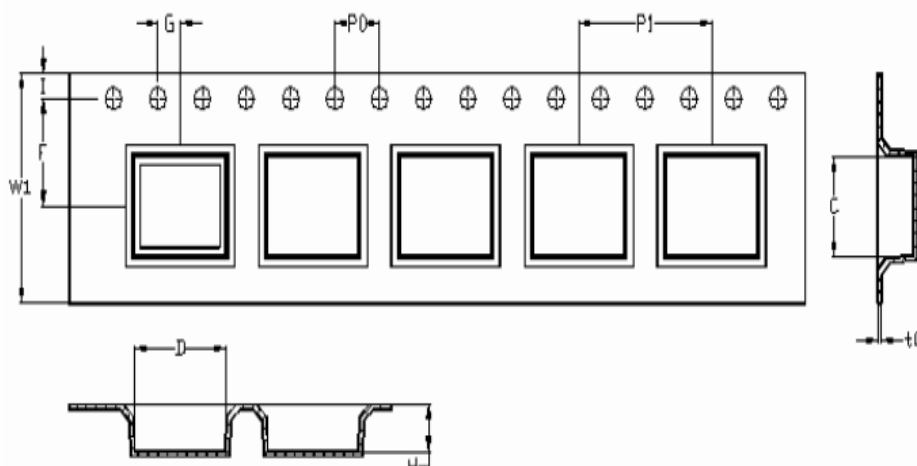

Series	size	W1(mm)	l(mm)	F(mm)	P0(mm)	G(mm)	P1(mm)	C(mm)	t0(mm)	D(mm)	H(mm)
CMW5045A	5045	12.00±0.3	1.75±0.1	5.50±0.1	4.00±0.1	2.00±0.1	8.00±0.1	4.9±0.1	0.35±0.05	5.10±0.1	2.70±0.1

Version: 1.0

PACKING FOR SMD


**RoHS
COMPLIANT**

ITEM P/N	CMW5045A-102	TEST INSTRUMENT	4291B、4339B
PRODUCT	Common Choke Coil For Power Lines	TEST FREQUENCY	100 MHz / 0.5V

Packaging Information

Chip size	Chip/Reel
CMW504	2500

Tearing Off Force

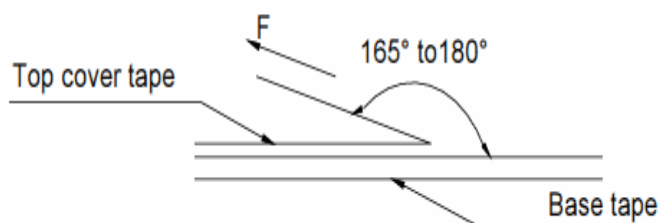

The force for tearing off cover tape is 15 to 80 grams in the arrow direction under the following conditions.

Room Temp. (°C)	Room Humidity (%)	Room atm (hPa)	Tearing Speed mm/min
5~35	45~85	860~1060	300

Application Notice

• Storage Conditions

To maintain the solderability of terminal electrodes:

1. products meet IPC/JEDEC J-STD-020D standard-MSL, level 1.
2. Temperature and humidity conditions: Less than 40°C and 60% RH.
3. Recommended products should be used within 12 months form the time of delivery.
4. The packaging material should be kept where no chlorine or sulfur exists in the air.

• Transportation

1. Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
2. The use of tweezers or vacuum pick up is strongly recommended for individual components.
3. Bulk handling should ensure that abrasion and mechanical shock are minimized.

出廠檢驗報告

CUSTOMER :			CUSTOMER PART/NO :					DATE : 2016/6/22				
								Test Freq. 100MHz				
LOT NO :			HT PART/NO :					Quantity : KPCS				
			CMW5045A-102					Sampling : 10 PCS				
ITEM :	SPEC.	Tolerance	1	2	3	4	5	6	7	8	9	10
Z	1000Ω	Typ.	885	849	876	883	901	891	860	929	877	885
Rdc	0.024Ω	±40%	0.0231	0.0237	0.0234	0.0231	0.0228	0.0233	0.024	0.023	0.0223	0.0232
IR	10MΩ	Min.	OK	OK	OK	OK	OK	OK	OK	OK	OK	OK
DIMENSION	A : m/m	5.0 ± 0.3	4.95	4.94	4.96	4.95	4.95					
	B : m/m	4.5 ± 0.3	4.50	4.51	4.51	4.50	4.51					
	C : m/m	2.5 Max.	2.31	2.32	2.32	2.31	2.31					
	: m/m											
	: m/m											
	: m/m											
CONFIGURATION												
											JUDGMENT :	
											<input checked="" type="checkbox"/> ACC. <input type="checkbox"/> REJ.	
TEST INSTRUMENTS:											APPROVED	
<input checked="" type="checkbox"/> HP4291A RF LCR METER 16197 <input type="checkbox"/> HP4287A RF LCR METER 16197 <input checked="" type="checkbox"/> CHROMA 16502 MILLIOHM ME <input checked="" type="checkbox"/> 游標卡尺 <input checked="" type="checkbox"/> CHROMA 19073 AC/DC/IR HIPOT TESTER <input type="checkbox"/> ALGOL NK-100 PUSH PULL GAUGE											陳學濬	
											INSPECTED	
											Ivy	

保存期限:1年

HT-Q4007-08